


## High Flex Power Over Mini Camera Link – POMCLP-xx-P

### Product Outline

This new Camera Link assembly is capable of transmitting power directly to the camera from a PC framegrabber while transmitting exceptional Camera Link signals, eliminating the need for a separate power supply at the camera.

The POCL marked overmold ensures that POCL will not be confused with a standard Camera Link assembly in the field.

The mini CL interface offers the same performance of standard CL in a compact size. This assembly allows for use between standard CL and Mini CL cameras and framegrabbers.

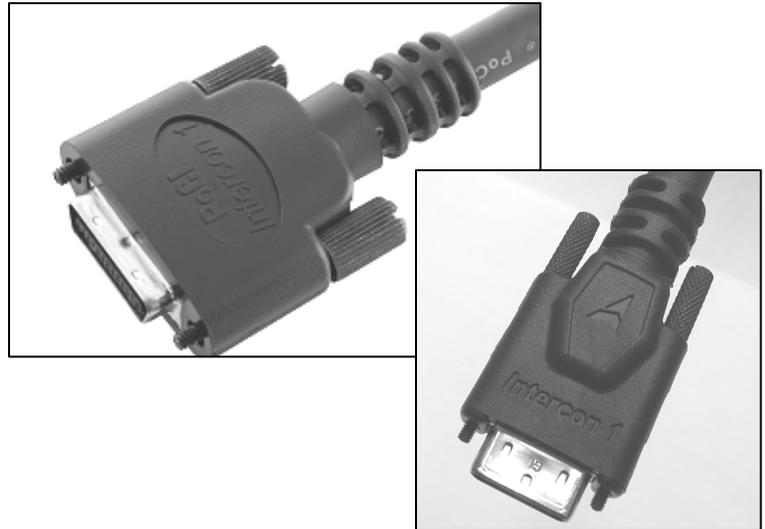

### Main Product Specifications

#### Features

- POCL marked Overmolding for easy identification
- Durable High Flex Cable
- Thumbscrew Locking
- 360 degree shielding
- RoHS Compliant

#### Cable Specifications

Cable Specifications	
Overall Diameter	.385 Inches
Max Temperature	80 Degrees C
Jacket Color	Black
UL/CSA Rated	20276 AWM I/II
Min. Bend Radius	3.85 Inches
Flame Rating	FT-1

#### Primary Components

Primary Components	
Cable	11 Individually Shielded Twisted Pairs
Connector A	26 Pos MDR
Connector B	26 Pos SDR

### Ordering Information

Order Number	Description
POMCLP-xx-P	Industrial Power Over Camera Link

Replace xx with length in meters  
For cables longer than 10 meters contact customer service

[Return to Top](#)

**Custom variations available. Please contact customer service for additional information.**  
**Intercon 1** A Division of Nortech Systems, Inc. - 7746 Goedderz Road - Baxter, MN USA 56425  
 P 218.828.3157 - Toll Free in US 800.237.9576 - FAX 218.828.1096 - [intercon@nortechsys.com](mailto:intercon@nortechsys.com)